

Quantum Optical Phase Estimation by Phase-Locked Loops




Mankei Tsang, Jeffrey H. Shapiro, and Seth Lloyd

mankei@mit.edu

xQIT, MIT

Motivation

- Coherent Optical Communications
 - PM: $m(t) \propto \phi(t)$
 - FM: $m(t) \propto \dot{\phi}(t)$
- Optical Sensing
 - $x(t) \propto \phi(t)$
 - Laser Doppler Velocimetry: $v(t) \propto \dot{\phi}(t)$
- Metrology
 - Clock stability characterized by $\dot{\phi}(t)$ fluctuations.
- Definition, measurements, and fundamental quantum accuracy limits of $\phi(t)$ and $\dot{\phi}(t)$.

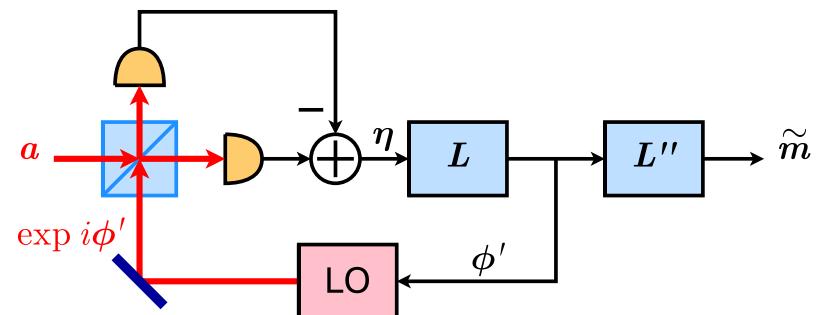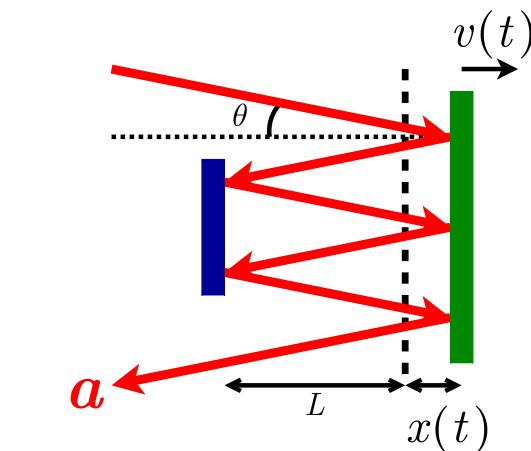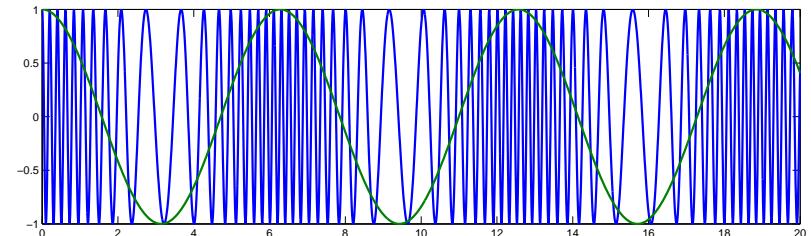

Quantization of 1D Optical Fields

- Frequency modes:

$$[\hat{a}(\omega), \hat{a}^\dagger(\omega')] = \delta(\omega - \omega'). \quad (1)$$

- Rotating-wave approximation:

$$\hat{A}(t) = \frac{1}{\sqrt{2\pi}} \int_{-\infty}^{\infty} d\omega \hat{a}(\omega) \exp(-i\omega t), \quad [\hat{A}(t), \hat{A}^\dagger(t)] = \delta(t - t'). \quad (2)$$

- Continuous-time Fock states:

$$|dn(t)\rangle \equiv \prod_j \frac{1}{\sqrt{dn(t_j)!}} \left[\hat{A}^\dagger(t_j) \sqrt{dt} \right]^{dn(t_j)} |0\rangle,$$
$$\hat{A}^\dagger(t) \hat{A}(t) |dn(t)\rangle = \left[\sum_j dn(t_j) \delta(t - t_j) \right] |dn(t)\rangle. \quad \begin{array}{c} \uparrow \\ \dots t_1 \quad t_2 \quad t_3 \quad t_4 \quad \dots \end{array} \quad t \quad (3)$$

- J. H. Shapiro, Quantum Semiclass. Opt. **10**, 567 (1998).

Temporal-Phase POVM

- Generalizing Susskind-Glogower phase states:

$$|\phi(t)\rangle = \sum_{dn(t)} \exp \left[i \int_{-\infty}^{\infty} dt \frac{dn(t)}{dt} \phi(t) \right] |dn(t)\rangle \quad (4)$$

$$= \sum_{dn(t)} \exp \left[i \sum_j dn(t_j) \phi(t_j) \right] |dn(t)\rangle \quad (5)$$

- Temporal-Phase POVM:

$$\hat{\Pi}[\phi(t)] \equiv |\phi(t)\rangle\langle\phi(t)|, \quad P[\phi(t)] = \text{Tr} \left\{ \hat{\rho} \hat{\Pi}[\phi(t)] \right\}, \quad (6)$$


$$\int D\phi(t) \hat{\Pi}[\phi(t)] = \hat{1}, \quad D\phi(t) = \lim_{\delta t \rightarrow 0} \prod_k \frac{d\phi(t + k\delta t)}{2\pi}. \quad (7)$$



Tsang, Shapiro, and Lloyd, Phys. Rev. A **78**, 053820 (2008); QCMC 2008 Conference Proceedings, P1-83.

- Difficult to realize experimentally.

Homodyne Detection

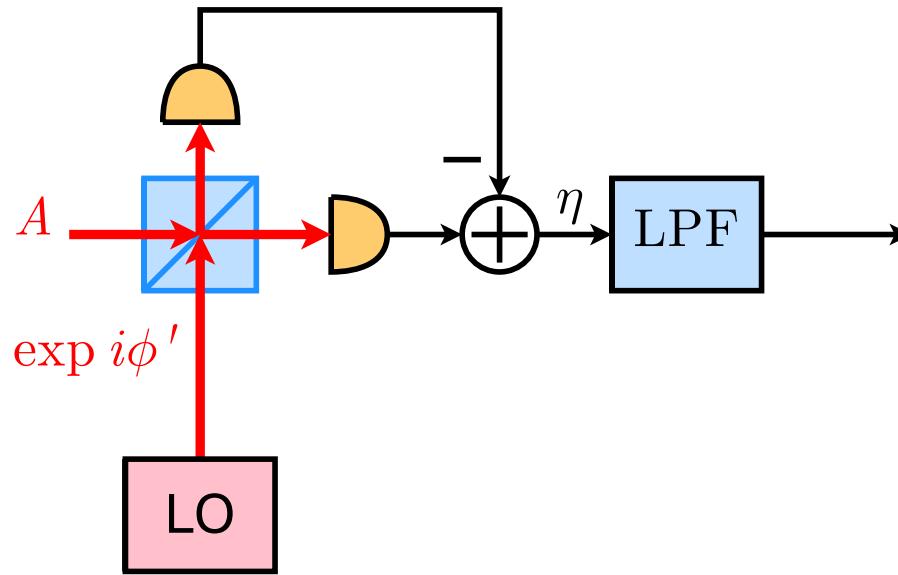


- Output of homodyne detection:

$$\langle \hat{\eta}(t) \rangle \propto -i \left\langle \hat{a} \exp(-i\phi') - \hat{a}^\dagger \exp(i\phi') \right\rangle = 2|\alpha| \sin[\bar{\phi}(t) - \phi'(t)]. \quad (8)$$

- Statistics of $\hat{\eta}(t)$ obey Wigner distribution.
- If $\phi'(t) \approx \bar{\phi}(t)$, $\hat{\eta}(t)$ depends approximately linearly on $\bar{\phi}(t)$.
- Does not work if $\bar{\phi}(t)$ has large fluctuations.

Adaptive Homodyne Detection

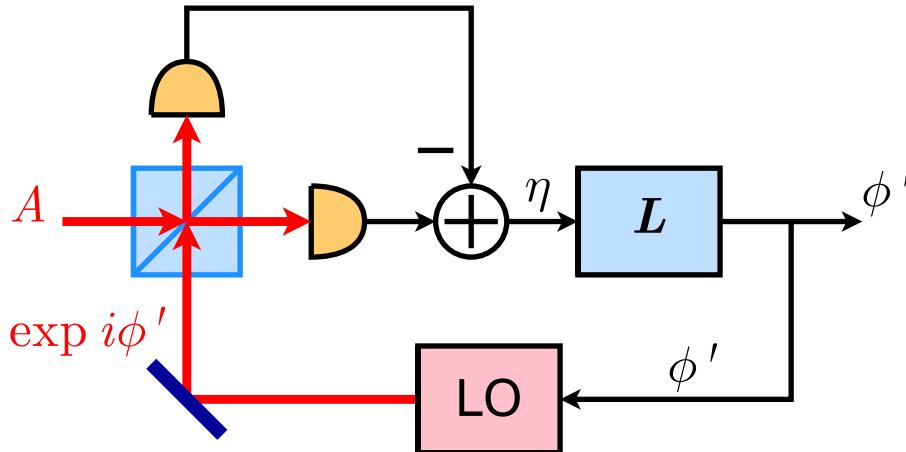

- Single-mode phase measurement:

- Wiseman, Phys. Rev. Lett. **75**, 4587, (1995).
- Armen *et al.*, Phys. Rev. Lett. **89**, 133602 (2002).

- Phase-Locked Loop (PLL)


- Viterbi, *Principles of Coherent Communications* (McGraw-Hill, New York, 1966).
- H. L. Van Trees, *Detection, Estimation, and Modulation Theory, Part I* (Wiley, New York, 2001); *Part II: Nonlinear Modulation Theory* (Wiley, New York, 2002).
- A. B. Bagherer, *State Variables and Communication Theory* (MIT Press, Cambridge, 1970).

Phase-Locked Loop Design for Coherent States

- Wigner distribution for coherent states:

$$W[X_1(t), X_2(t)] \propto \exp \left\{ -\frac{1}{2} \int_{-\infty}^{\infty} dt \left\{ [X_1(t) - \bar{X}_1(t)]^2 + [X_2(t) - \bar{X}_2(t)]^2 \right\} \right\}, \quad (9)$$


$$\langle \Delta X_{1,2}(t) \Delta X_{1,2}(\tau) \rangle = \delta(t - \tau). \quad (10)$$

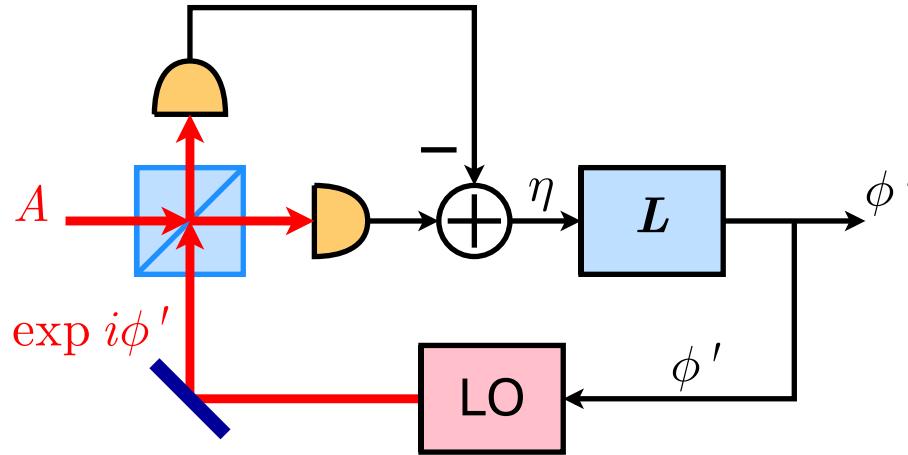

- Upon homodyne detection, a coherent state can be regarded as a classical signal with **additive white Gaussian noise**,

$$\eta(t) = \sin [\bar{\phi}(t) - \phi'(t)] + z(t), \quad \langle z(t) z(\tau) \rangle = \frac{1}{4|\alpha|^2} \delta(t - \tau), \quad |\alpha|^2 = \frac{\mathcal{P}}{\hbar\omega_0}. \quad (11)$$

Wiener Filtering

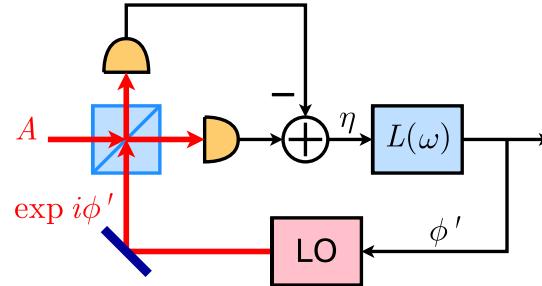

- Let the mean phase be a classical stationary Gaussian random process:

$$\langle \bar{\phi}(t)\bar{\phi}(\tau) \rangle = K_{\bar{\phi}}(t - \tau), \quad S_{\bar{\phi}}(\omega) = \int_{-\infty}^{\infty} dt K_{\bar{\phi}}(t) \exp(i\omega t), \quad (12)$$

- Assume that the PLL is phase locked,

$$\langle [\bar{\phi}(t) - \phi'(t)]^2 \rangle \ll 1, \quad \eta(t) \approx 2|\alpha| [\bar{\phi}(t) - \phi'(t)] + z(t). \quad (13)$$


- $L(\omega)$ can be designed using the Wiener filtering technique.
- Phase-locking condition:

$$\langle [\bar{\phi}(t) - \phi'(t)]^2 \rangle = \frac{1}{4|\alpha|^2} \int_{-\infty}^{\infty} \frac{d\omega}{2\pi} \ln[1 + 4|\alpha|^2 S_{\bar{\phi}}(\omega)] \ll 1. \quad (14)$$

Example: Ornstein-Uhlenbeck Process


- Power spectral density of mean phase $\bar{\phi}(t)$:

$$S_{\bar{\phi}}(\omega) = \frac{\kappa}{\omega^2 + k^2}. \quad (15)$$

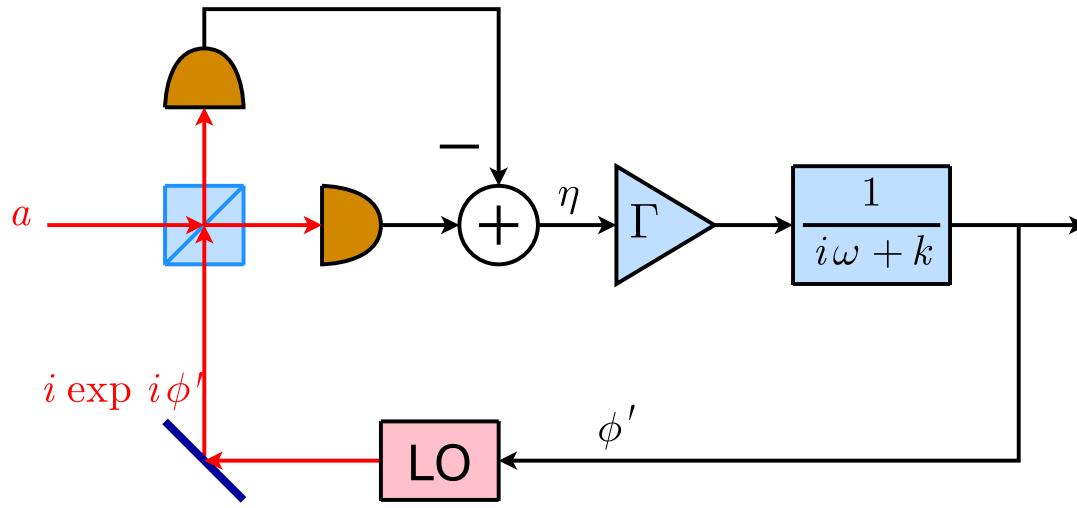

$$\Gamma = \sqrt{\frac{4\kappa\mathcal{P}}{\hbar\omega_0}} - k, \quad \langle (\bar{\phi} - \phi')^2 \rangle = \frac{\hbar\omega_0 k}{4\mathcal{P}} \left(\sqrt{\frac{4\kappa\mathcal{P}}{\hbar\omega_0 k^2}} - 1 \right) \approx \frac{1}{2} \sqrt{\frac{\hbar\omega_0 \kappa}{\mathcal{P}}}. \quad (16)$$

Kalman-Bucy Filtering

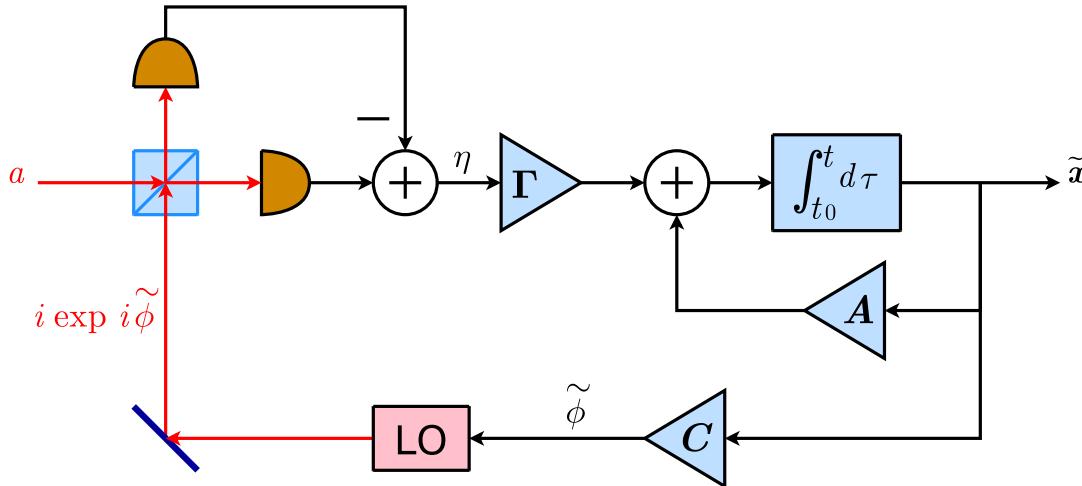

- Model $\bar{\phi}(t)$ as solution of stochastic differential equations:

$$\frac{d\mathbf{x}}{dt} = \mathbf{A}\mathbf{x} + \mathbf{B}\mathbf{u}, \quad \langle \mathbf{u}(t) \otimes \mathbf{u}(\tau) \rangle = \mathbf{U}\delta(t - \tau), \quad \bar{\phi}(t) = \mathbf{C}(t) \cdot \mathbf{x}(t), \quad (17)$$

- Again linearizing $\eta(t) \approx \bar{\phi} - \tilde{\phi} + z$, use $\eta(t)$ as the Kalman-Bucy “innovation”, and obtain the Kalman-Bucy variance equation for $\Sigma(t) \equiv \langle [\mathbf{x}(t) - \tilde{\mathbf{x}}(t)] \otimes [\mathbf{x}(t) - \tilde{\mathbf{x}}(t)] \rangle$ and “gain,”

$$\frac{d\Sigma}{dt} = \mathbf{A}\Sigma + \Sigma\mathbf{A}^T - \frac{4\mathcal{P}}{\hbar\omega_0}\Sigma\mathbf{C}^T\mathbf{C}\Sigma + \mathbf{B}\mathbf{U}\mathbf{B}^T, \quad \Gamma = \frac{4\mathcal{P}}{\hbar\omega_0}\Sigma\mathbf{C}^T. \quad (18)$$

Smoothing

- Both Wiener filtering and Kalman-Bucy filtering seeks the optimal **real-time** estimate of phase $\bar{\phi}(t)$ at time t given **the past** measurement record:

$$\phi'(t) \approx \int D\bar{\phi}(t) \bar{\phi}(t) P[\bar{\phi}(t) | \eta(\tau), t_0 \leq \tau < t] \quad (19)$$

- More advanced measurements $(\eta(\tau), \tau > t)$ also contains info about $\bar{\phi}(t)$, so if we allow **estimation delay**, we will be able to improve the estimation.
- Optimal delayed estimation (**smoothing**):


$$\tilde{\phi}(t) = \int D\bar{\phi}(t) \bar{\phi}(t) P[\bar{\phi}(t) | \eta(\tau), t_0 \leq \tau \leq T] \quad (20)$$

- Maximum a posteriori (MAP) estimation: maximizing the **a posteriori** quasi-probability density:

$$P[\bar{\phi}(t) | A(\tau), -\infty \leq \tau \leq \infty] = \frac{W[A(\tau) | \bar{\phi}(t)] P[\bar{\phi}(t)]}{\int D\bar{\phi}(t) W[A(\tau) | \bar{\phi}(t)]}. \quad (21)$$



Maximum a Posteriori (MAP) Estimation

- MAP estimation can be achieved by PLL + post-loop filter:

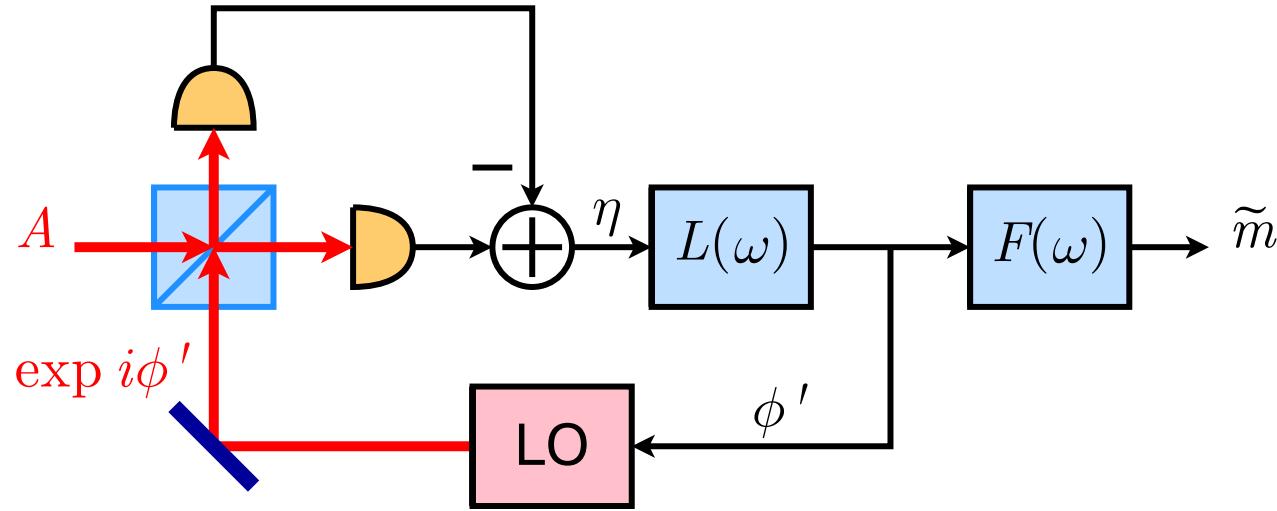

Example: Ornstein-Uhlenbeck Process

- For phase modulation, let $\bar{\phi}(t) = \beta m(t)$.

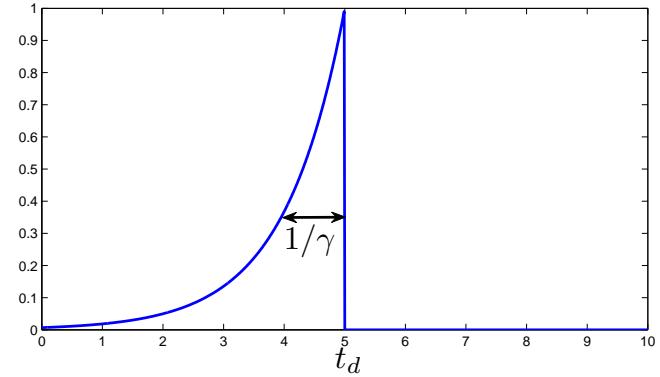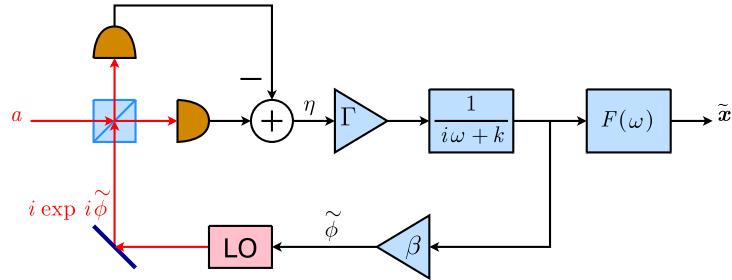

$$F(\omega) = \frac{k + \gamma}{-i\omega + \gamma} \exp(-i\omega t_d), \quad \gamma \equiv \left(\frac{4\kappa\beta^2\mathcal{P}}{\hbar\omega_0} + k^2 \right)^{1/2}. \quad (22)$$

- “Irreducible Error”:

$$\langle (m - \tilde{m})^2 \rangle = \int_{-\infty}^{\infty} \frac{d\omega}{2\pi} \frac{S_m(\omega)}{4|\alpha|^2\beta^2 S_m(\omega) + 1} = \frac{\kappa}{2\gamma} \approx \frac{1}{4\beta} \sqrt{\frac{\hbar\omega_0\kappa}{\mathcal{P}}} \quad (23)$$

~ 3 dB better than Wiener or Kalman-Bucy filtering.

Fundamental Quantum Limits

- A band-limited random process:

$$S_m(\omega) = \begin{cases} 1/b, & |\omega| \leq \pi b, \\ 0, & |\omega| > \pi b, \end{cases} \quad \mathcal{N} \equiv \frac{\mathcal{P}}{\hbar\omega_0 b}, \quad \Lambda(r) \equiv (\mathcal{N} - \sinh^2 r) \exp(2r). \quad (24)$$


	SQL SNR	Squeezed	Threshold	Max. SNR
Homodyne PLL, PM	$4\beta^2 \mathcal{N}$	$4\beta^2 \Lambda$	$\frac{\exp(4r)}{\Lambda} \ln(1 + \beta^2 \Lambda) \ll 1$	$\ll 8\beta^2 \mathcal{N}^2 / \ln \mathcal{N}$
Homodyne PLL, FM	$12\beta^2 \mathcal{N}$	$12\beta^2 \Lambda$	$\frac{\exp(4r)}{\Lambda} \ln(1 + \beta^2 \Lambda) \ll 1$	$\ll 24\beta^2 \mathcal{N}^2 / \ln \mathcal{N}$
POVM + PLL, PM	$4\beta^2 \mathcal{N}$	$4\beta^2 \Lambda$	$\frac{1}{\Lambda} \ln(1 + \beta^2 \Lambda) \ll 1$	$4\beta^2 \mathcal{N}(\mathcal{N} + 1)$
POVM + PLL, FM	$12\beta^2 \mathcal{N}$	$12\beta^2 \Lambda$	$\frac{1}{\Lambda} \ln(1 + \beta^2 \Lambda) \ll 1$	$12\beta^2 \mathcal{N}(\mathcal{N} + 1)$

- Increasing modulation index β can enhance the SNR, but the optical bandwidth is also increased,

$$\text{PM : } \bar{\phi}(t) = \beta m(t), \quad \text{FM : } \bar{\phi}(t) = -\pi\beta b \int_{-\infty}^t d\tau m(\tau), \quad (25)$$


$$A(t) = |\alpha| \exp[i\bar{\phi}(t)], \quad \text{Optical } B \sim (\beta + 1)b. \quad (26)$$

Multipass Position and Velocity Sensing

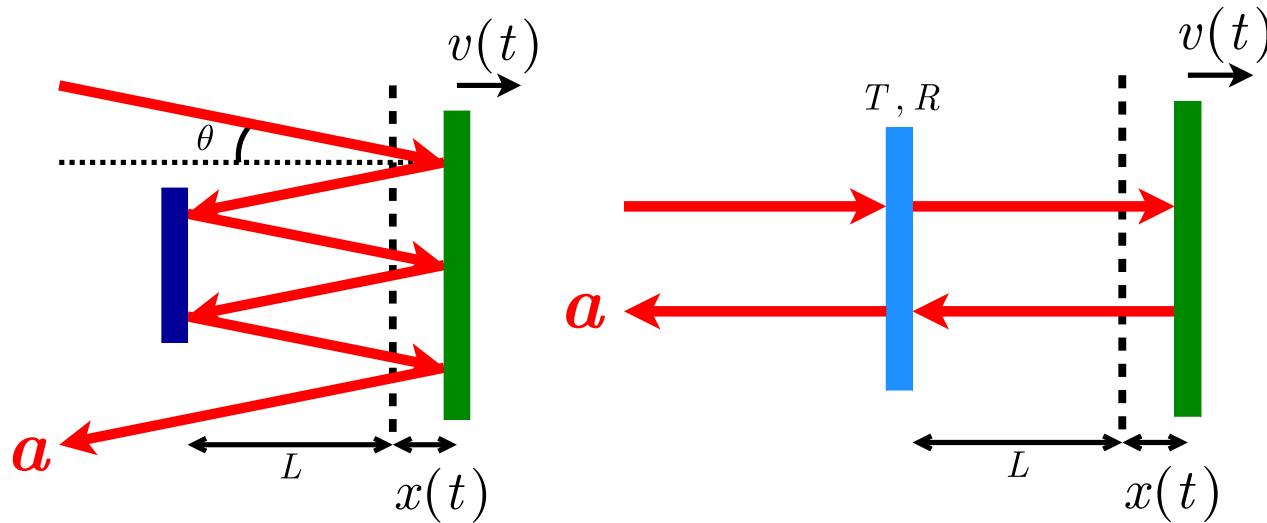

- Multipass constant phase measurements:
 - Giovannetti, Lloyd, and Maccone, Phys. Rev. Lett. **96**, 010401 (2006).
 - Higgins et al., Nature **450**, 393 (2007).
- With a homodyne PLL, we can **continuously** monitor the mirror position and velocity **simultaneously** at the quantum limit using a **high-power** coherent state.
- If the optical beam hits the target **multiple times** before $x(t)$ and $v(t)$ change significantly, $\beta \propto M$, and the SNR can be increased.

Quantum-Limited Position and Velocity Estimation

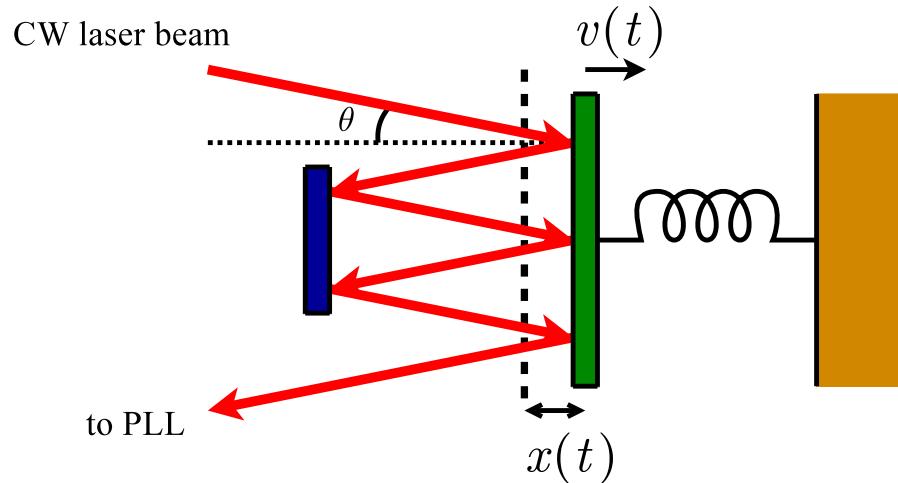

- System model:

$$\frac{dx}{dt} = v, \quad \frac{dv}{dt} = -\omega_m^2 x + \frac{2M\hbar\omega_0 \cos \theta}{mc} I(t), \quad \langle I(t)I(\tau) \rangle_{coh} = \frac{\mathcal{P}}{\hbar\omega_0} \delta(t - \tau). \quad (27)$$

- Equivalent observation process by homodyne PLL:

$$y = (2Mk_0 \cos \theta)x(t) + w(t), \quad \langle w(t)w(\tau) \rangle \approx \frac{\hbar\omega_0}{4\mathcal{P}} \delta(t - \tau). \quad (28)$$

- The mirror quantum state remains a Gaussian state under these approximations, and we can use Kalman-Bucy filtering.

Kalman-Bucy Filtering Errors

- The Kalman-Bucy covariances at steady state $t \rightarrow \infty$ are

$$\langle \Delta x^2 \rangle = \frac{\hbar}{2m\omega_m} \frac{\sqrt{2}}{Q} \left[(1 + Q^2)^{1/2} - 1 \right]^{1/2}, \quad (29)$$

$$\frac{1}{2} \langle \Delta x \Delta v + \Delta v \Delta x \rangle = \frac{\hbar}{2m} \frac{1}{Q} \left[(1 + Q^2)^{1/2} - 1 \right], \quad (30)$$

$$\langle \Delta v^2 \rangle = \frac{\hbar\omega_m}{2m} \frac{\sqrt{2}}{Q} \left[(1 + Q^2)^{1/2} - 1 \right]^{1/2} (1 + Q^2)^{1/2}, \quad (31)$$

$$Q \equiv \frac{8M^2\omega_0\mathcal{P}\cos^2\theta}{m\omega_m^2c^2}. \quad (32)$$

- Previously derived using a general QND measurement model in
 - Belavkin and Staszewski, Phys. Lett. A **140**, 359 (1989).
 - Doherty *et al.*, Phys. Rev. A **60**, 2380 (1999).
- At steady state, the conditioned mirror quantum state is a **pure Gaussian state**:

$$\langle \Delta x^2 \rangle \langle \Delta v^2 \rangle - \left(\frac{1}{2} \langle \Delta x \Delta v + \Delta v \Delta x \rangle \right)^2 = \frac{\hbar^2}{4m^2}. \quad (33)$$

Quantum-Limited Smoothing

- With post-processing, classical estimation theory predicts improved performance.
- Smoothing errors:

$$\langle \Delta x^2 \rangle = \frac{\hbar}{8m\omega_m} \left[\frac{1}{(1+iQ)^{1/2}} + \frac{1}{(1-iQ)^{1/2}} \right], \quad (34)$$

$$\langle \Delta v^2 \rangle = \frac{\hbar\omega_m}{8m} \left[(1+iQ)^{1/2} + (1-iQ)^{1/2} \right], \quad (35)$$

- Uncertainty product:

$$\langle \Delta x^2 \rangle \langle \Delta v^2 \rangle = \frac{\hbar^2}{32m^2} \left[1 + \frac{1}{(1+Q^2)^{1/2}} \right] < \frac{\hbar^2}{4m^2}. \quad (36)$$

- Resolution of paradox: We estimate the position and velocity of the mirror **some time in the past**, but the past quantum state of the mirror has been **irreversibly destroyed**.
 - We can't measure the mirror more accurately in the past without further disturbing it.
 - We can't **clone** the past quantum state of the mirror and store it for future comparisons.
 - We can't **reverse the quantum dynamics** of the mirror, because we have measured the phase and the radiation pressure force becomes **unknown to us**.

Delayed Estimation of Classical Information

- We can still estimate a classical force $F_{\text{ext}}(t)$ with delay:

$$m \frac{dv}{dt} = -m\omega_m^2 x + F_{\text{rad}}(t) + F_{\text{ext}}(t). \quad (37)$$

- For delayed estimation, current quantum trajectory theory needs to be modified.
 - Belavkin, Carmichael, Wiseman and Milburn, ...

$$\hat{\rho}_c(t), |\tilde{\psi}(t)\rangle \text{ given } \eta(\tau), \tau < t. \quad (38)$$


- For smoothing, we need

$$\text{conditioned “quantum state” at time } t, \text{ given } \eta(\tau), t_0 \leq \tau \leq T. \quad (39)$$

- Idea: Use two quantum states, one traveling forward in time from t_0 , and one traveling backward in time from T , ala Aharonov *et al.*

Conclusion

- Temporal-Phase POVM
- Phase-Locked Loop Design Using Classical Estimation Techniques
- Quantum Limits of Simultaneous Position and Velocity Estimation
- References:
 - Tsang, Shapiro, and Lloyd, "Quantum theory of optical temporal phase and instantaneous frequency," Phys. Rev. A **78**, 053820 (2008).
 - Tsang, Shapiro, and Lloyd, "Quantum theory of optical phase in the continuous time limit," (QCMC 2008 Conference Proceedings, submitted).
 - Tsang, Shapiro, and Lloyd, "Quantum optical phase estimation by homodyne phase-locked loops," (in preparation).

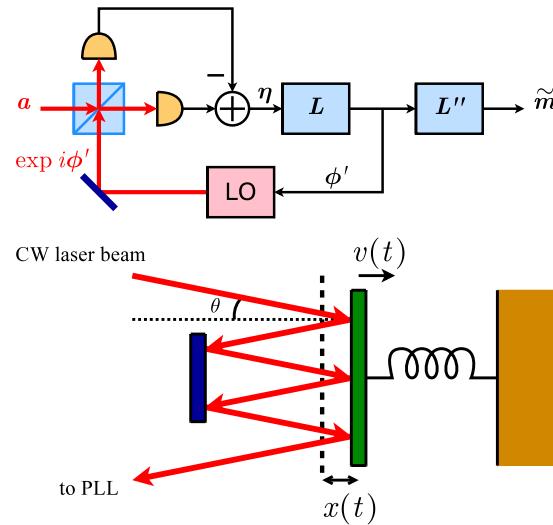

Maximum A Posteriori (MAP) Estimation

- To be more general, let

$$\bar{\phi}(t) = \int_{-\infty}^{\infty} d\tau h(t - \tau)m(\tau), \quad \langle m(t)m(\tau) \rangle = K_m(t, \tau). \quad (40)$$

$m(t)$ is the **message** we wish to estimate. For example,

$$h(t - \tau) = \beta\delta(t - \tau), \quad \bar{\phi}(t) = \beta m(t), \quad (\text{PM}) \quad (41)$$

$$h(t - \tau) = -2\pi\mathcal{F} \int_{t_0}^t du \delta(u - \tau), \quad \bar{\phi}(t) = -2\pi\mathcal{F} \int_{t_0}^t d\tau m(\tau). \quad (\text{FM}) \quad (42)$$

- MAP estimation: solve for the “most likely” message given our full measurement record:


$$\frac{\delta}{\delta m(t)} \left\{ \ln P[m(t)|A(\tau)] \right\}_{m(t)=\tilde{m}(t)} = 0, \quad (43)$$

$$\frac{\delta}{\delta m(t)} \left\{ \ln W[A(\tau)|m(t)] + \ln P[m(t)] \right\}_{m(t)=\tilde{m}(t)} = 0. \quad (44)$$

Phase-Locked Loop Design via MAP Estimation

- For coherent states, the MAP equation becomes

$$\tilde{m}(t) = 2|\alpha| \int d\tau du K_m(t, \tau) h(u - \tau) \eta[A(u), \tilde{\phi}(u)], \quad (45)$$

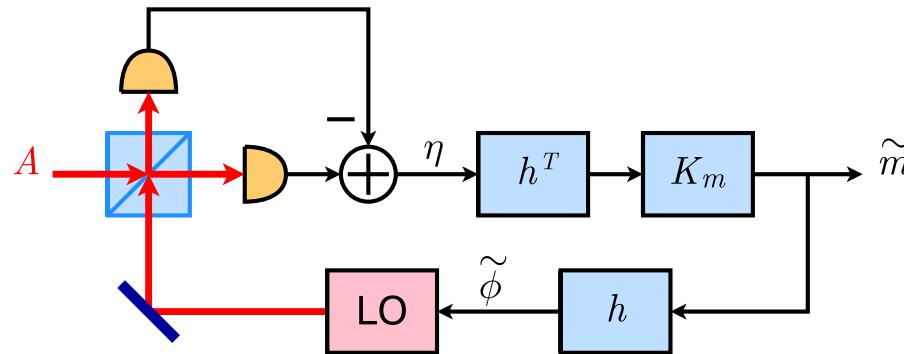

- The feedback filter $h^T * K_m * h$ is non-causal, this PLL is unrealizable.
- Linearizing η again, MAP estimation can be achieved by PLL + post-loop filter:

