

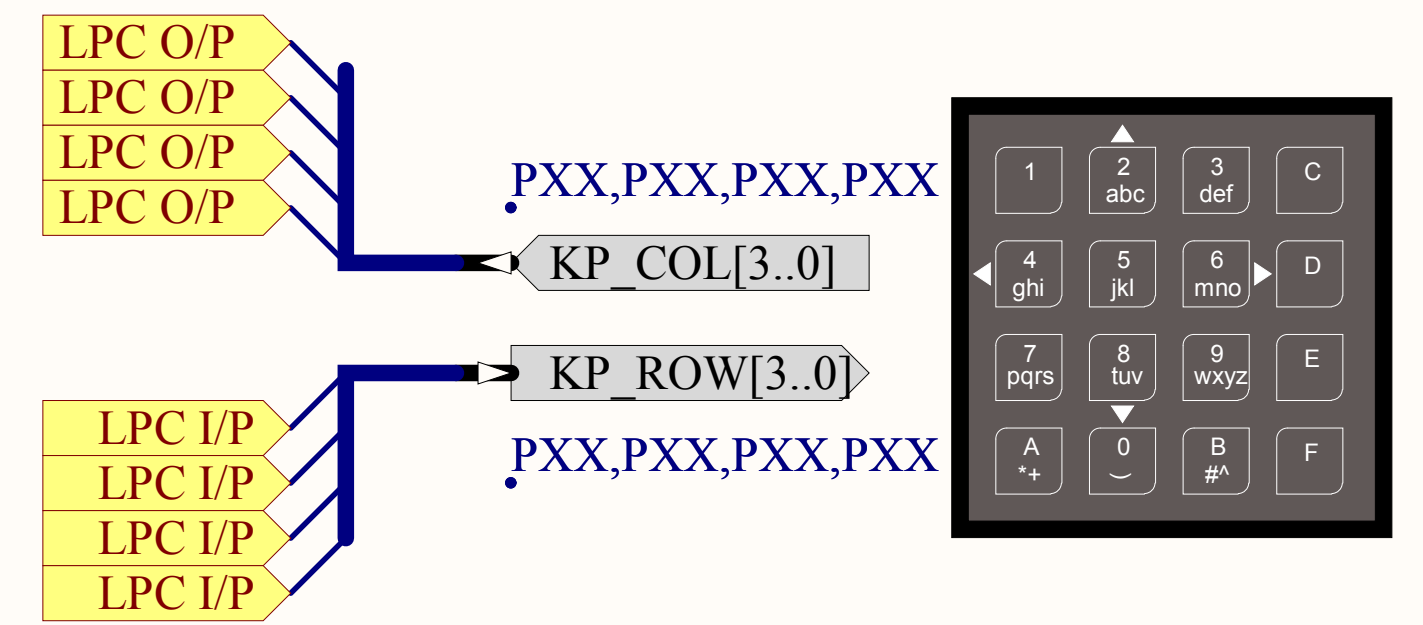
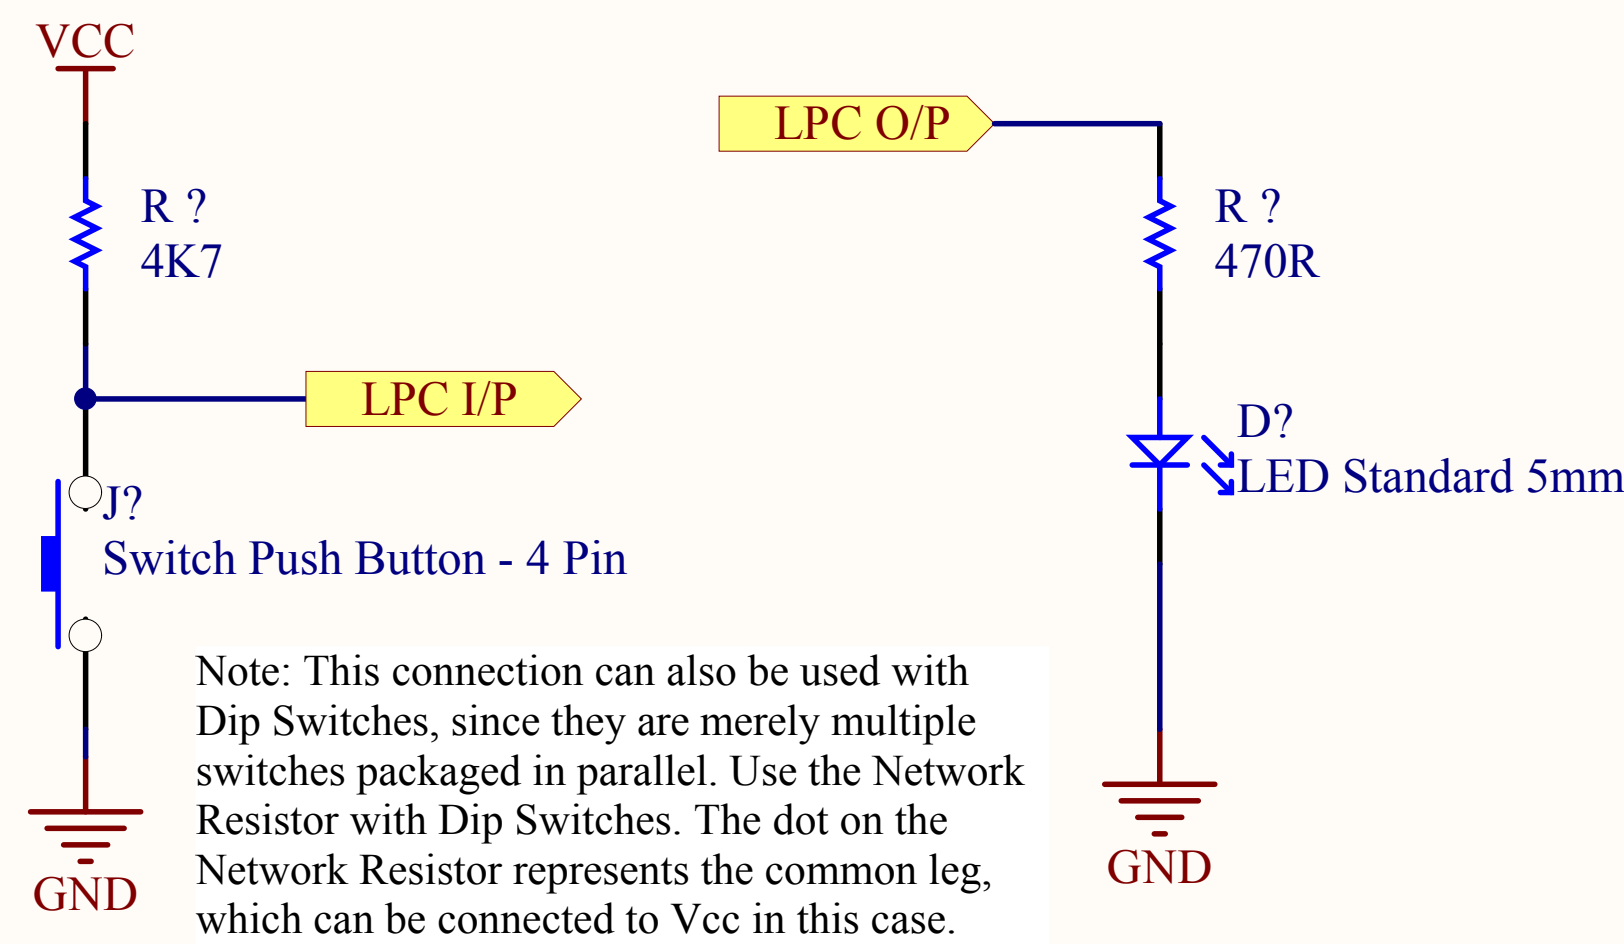
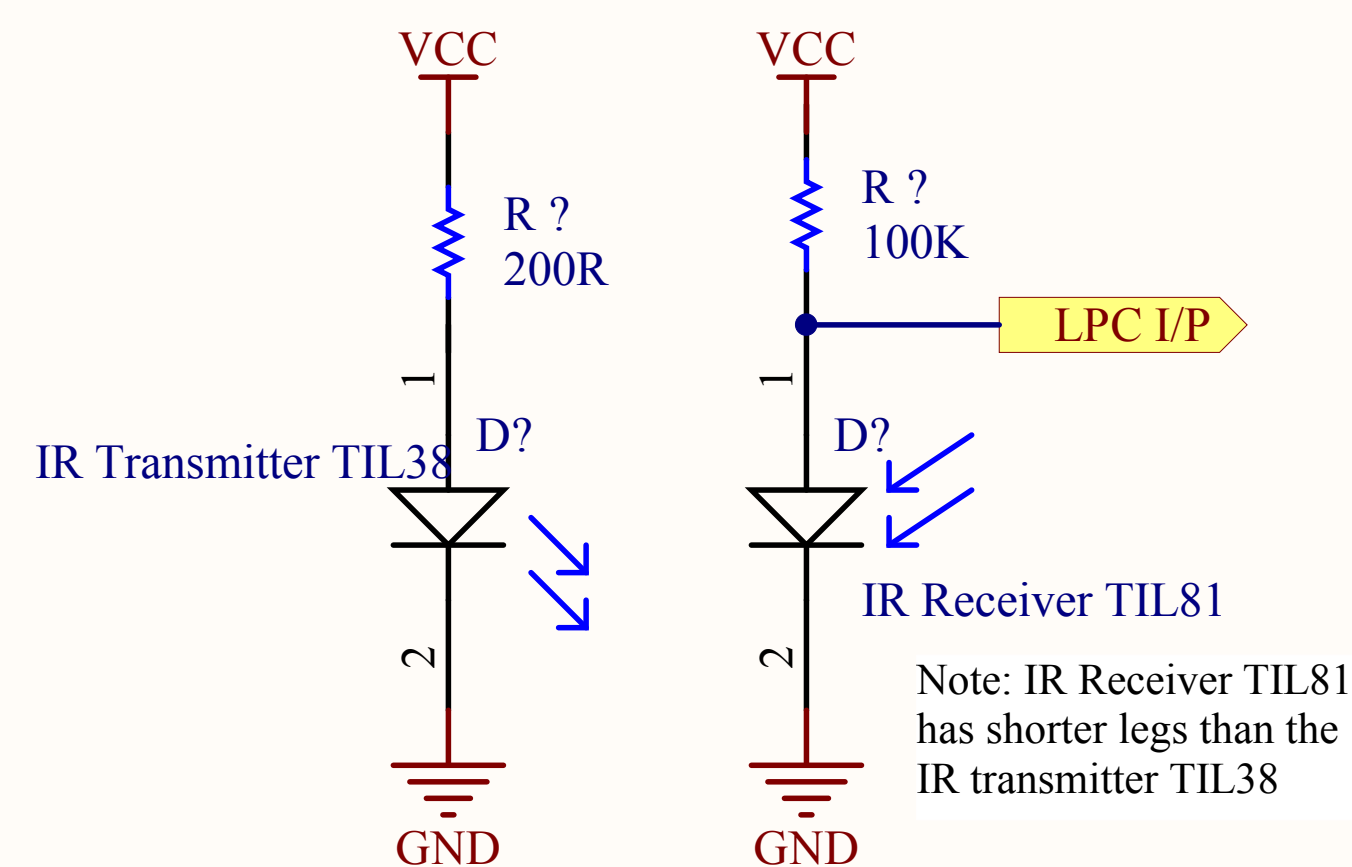


Note: These are just general directions of these ports. See below for suggested connections.

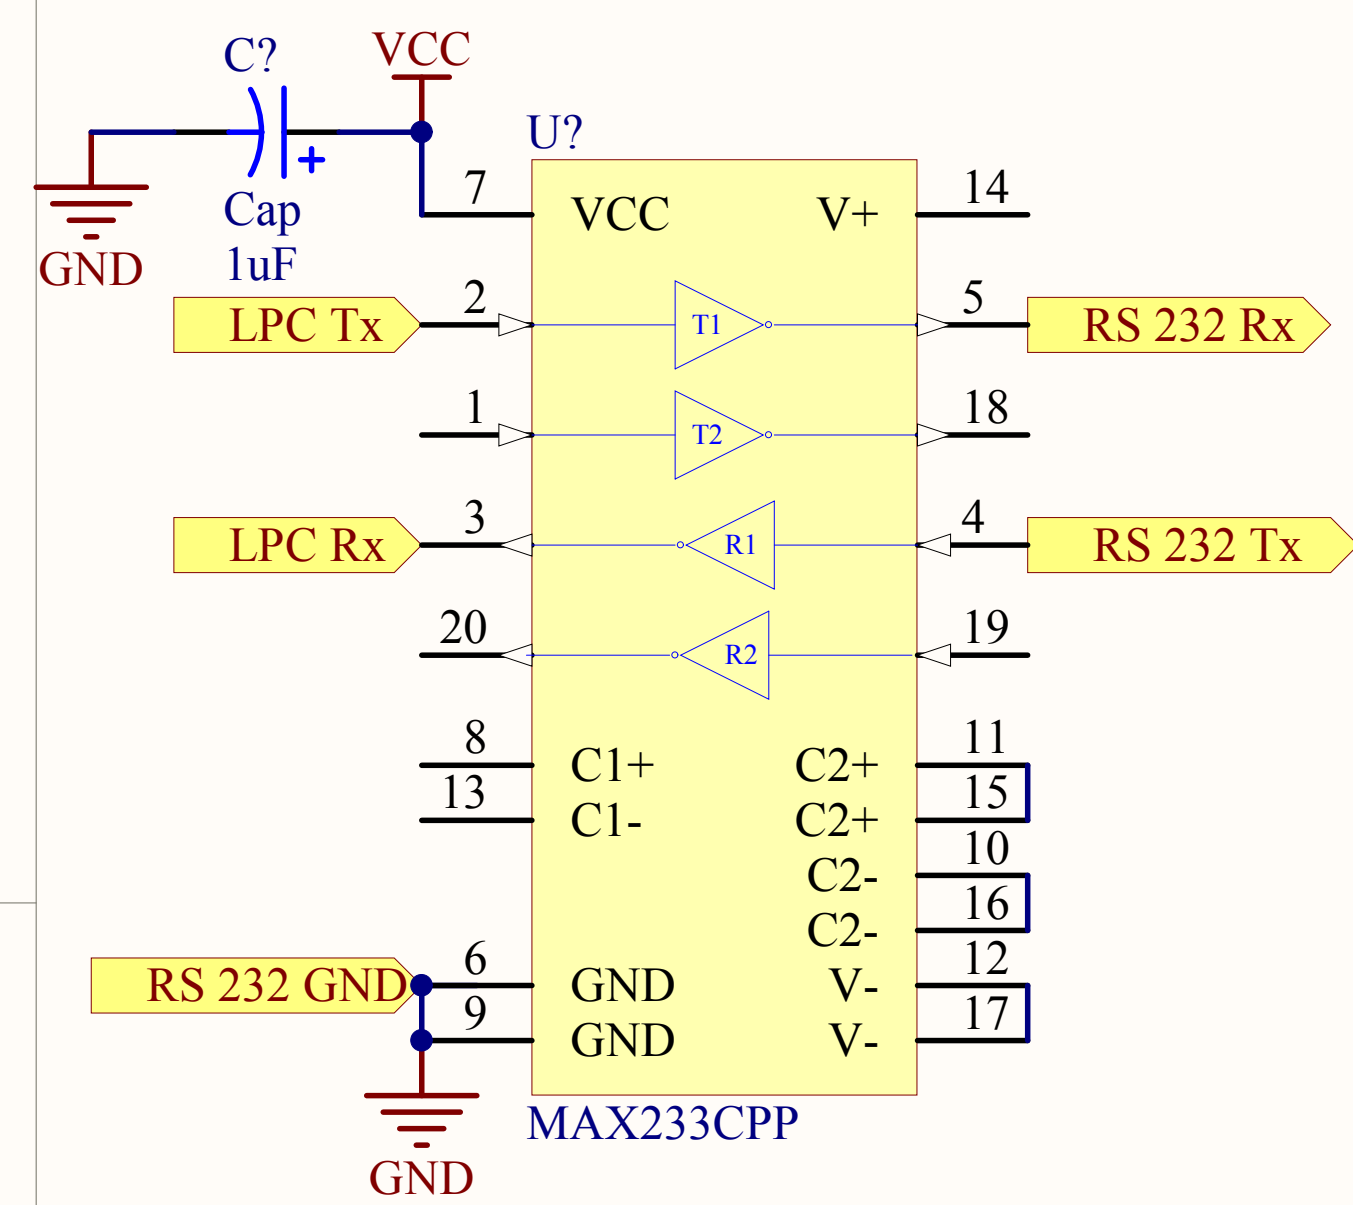

Servo Connectors: Black-GND, Red-5V & Yellow-Signal. Current limit: 700mA. Hence it should not be powered up with the portable Switching DC Power Supplies whose output current cannot be limited. Also, do not try to use the LPC development board to power it. Use a separate DC supply from the bench top Power Supply instead. The LPC O/P must be a train of pulses, and not a mere DC value. Check its datasheet for operation details.

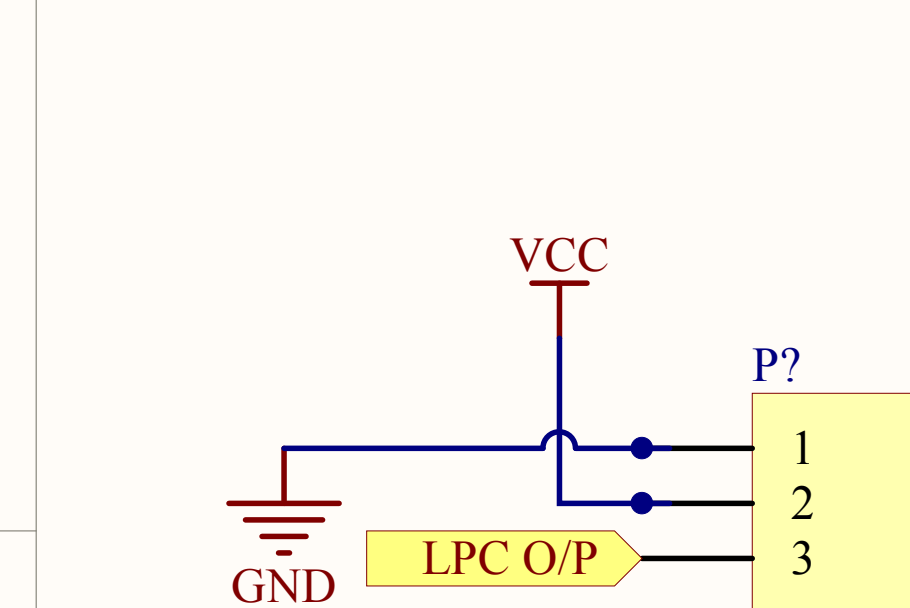